

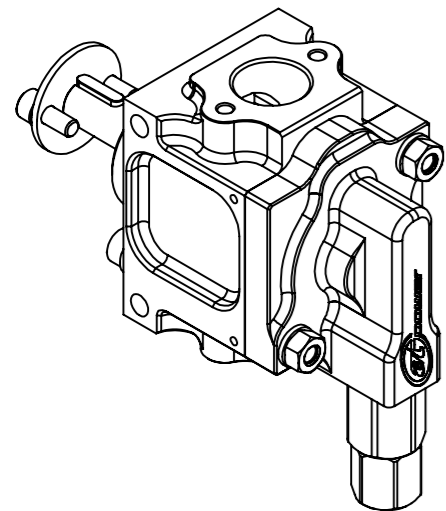
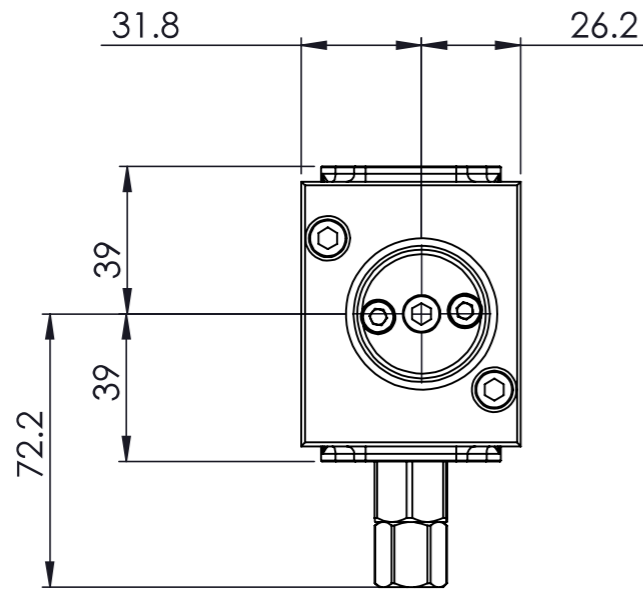


NOTES:


1. DISPLACEMENT PER REVERLUTION PER STAGE = 7.9 CC/REV
2. DISPLACEMENT AT 1000 RPM = 7.9 LT/MIN
3. PRV CRACKING PRESSURE:-
 MINIMUM = 2.9 BAR (42 PSI)
 MAXIMUM = 8.27 BAR (120PSI)
4. FOR EACH FULL TURN OF THE ADJUSTER THE CRACKING PRESSURE WILL INCREASE/DECREASE BY 0.25 BAR (3.6 PSI)

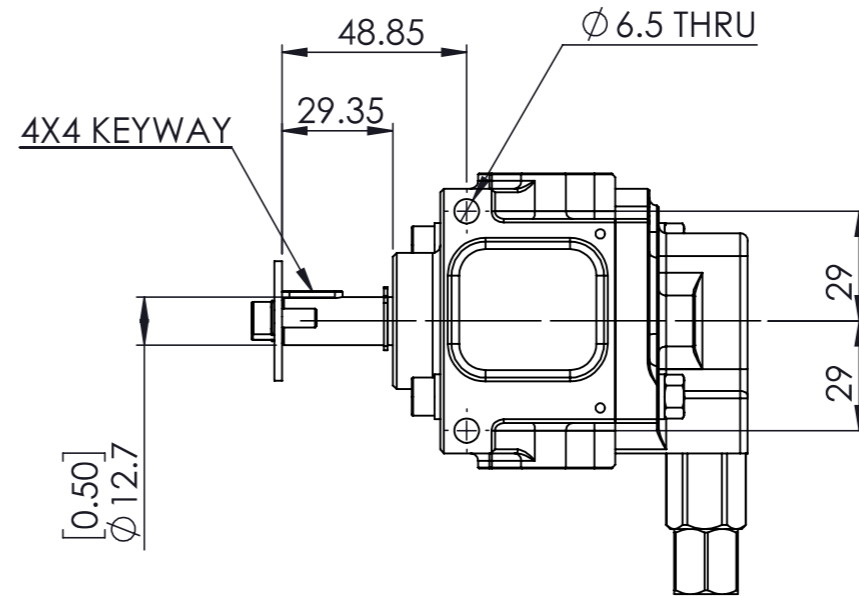

ISOMETRIC VIEW

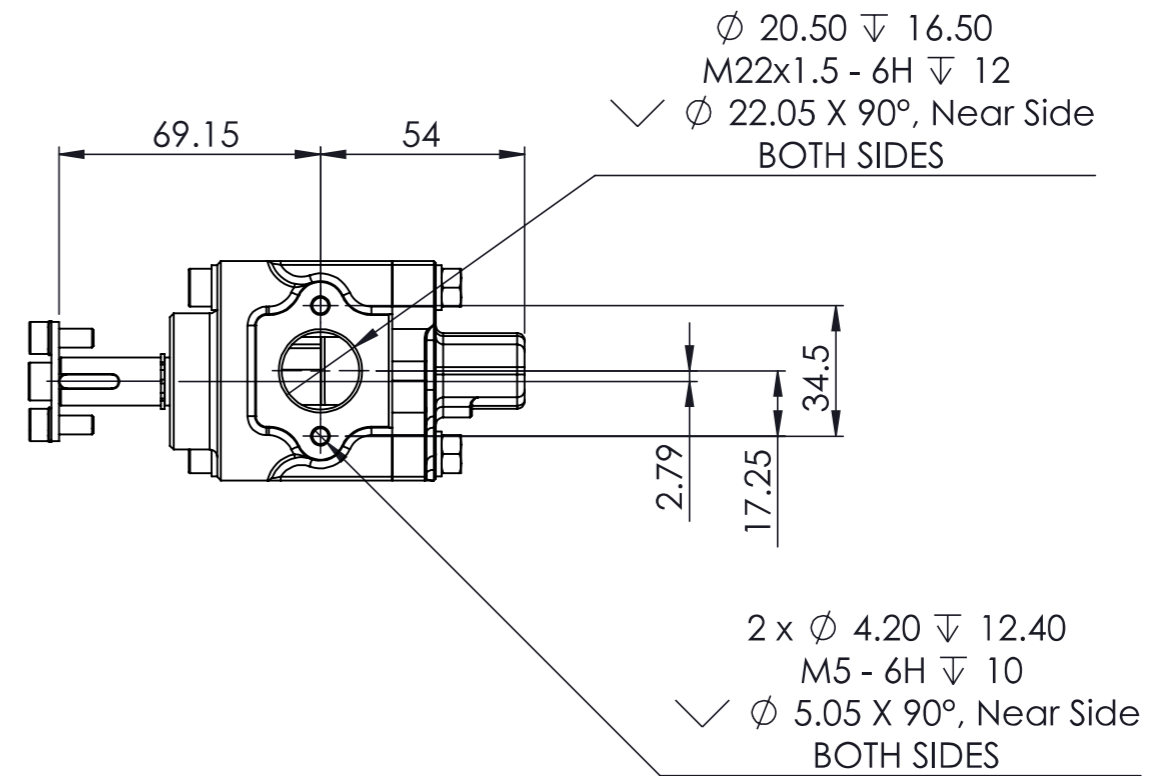

alpower
 COPYRIGHT © 2024
 S-CAN 3D LTD
 Unit 10b, Bunn's Bank Rd, Attleborough
 Norfolk, UK, NR17 1QD



UNLESS OTHERWISE STATED:
 DIMENSIONS IN MILLIMETRES
 TOLERANCES: LINEAR ± 0.1 ANGULAR $\pm 0.5^\circ$
 SURFACE FINISH $\surd = \surd$
 DRAWING STANDARDS TO ATQS 6003
 DATE FORMAT: DD/MM/YY

THIS DESIGN IS THE PROPERTY OF
 S-CAN 3D LTD AND MUST NOT BE
 PRODUCED OR REPLICATED
 WITHOUT AUTHORITY

SCALE	WEIGHT
1:2	-- kg
DRAWN-	S.HOW
DATE-	18/06/19
CHECKED-	S.HOW
APPROVED-	A.CLIFTON

MATERIAL	SEE COMPONENT PARTS
FINISH	SEE COMPONENT PARTS
DRAWING TITLE	1 STAGE MINI CORDIS-FLG MTG - PRESSURE PUMP-SHORT NOSE-7.9 Lt
DRAWING NUMBER	104-103-00111