

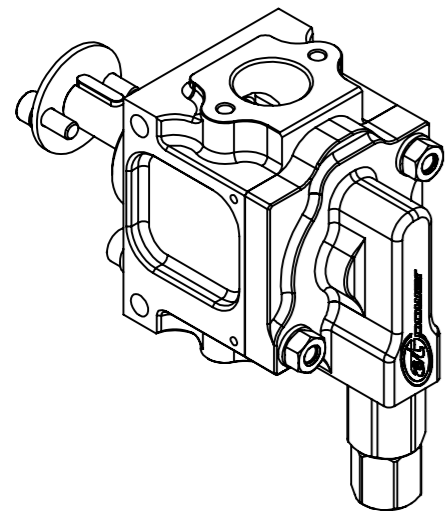
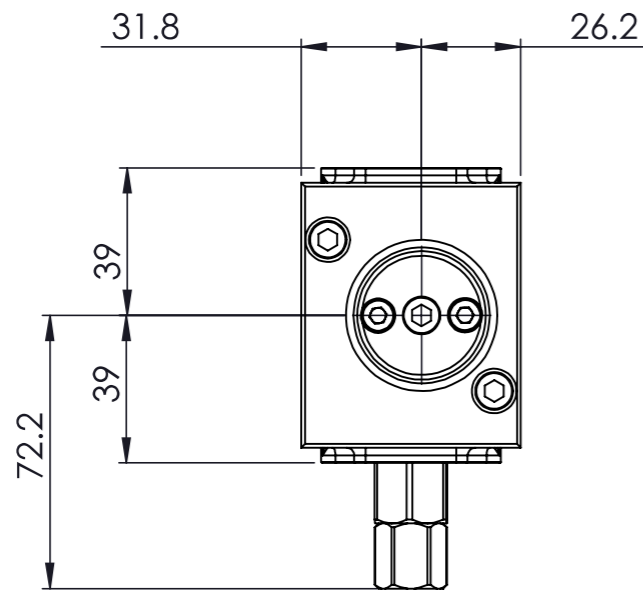


**NOTES:**

1. DISPLACEMENT PER REVERLUTION PER STAGE = 11.9 CC/REV
2. DISPLACEMENT AT 1000 RPM = 11.9 LT/MIN
3. PRV CRACKING PRESSURE:-  
 MINIMUM = 2.9 BAR (42 PSI)  
 MAXIMUM = 8.27 BAR (120PSI)
4. FOR EACH FULL TURN OF THE ADJUSTER THE CRACKING PRESSURE WILL INCREASE/DECREASE BY 0.25 BAR (3.6 PSI)

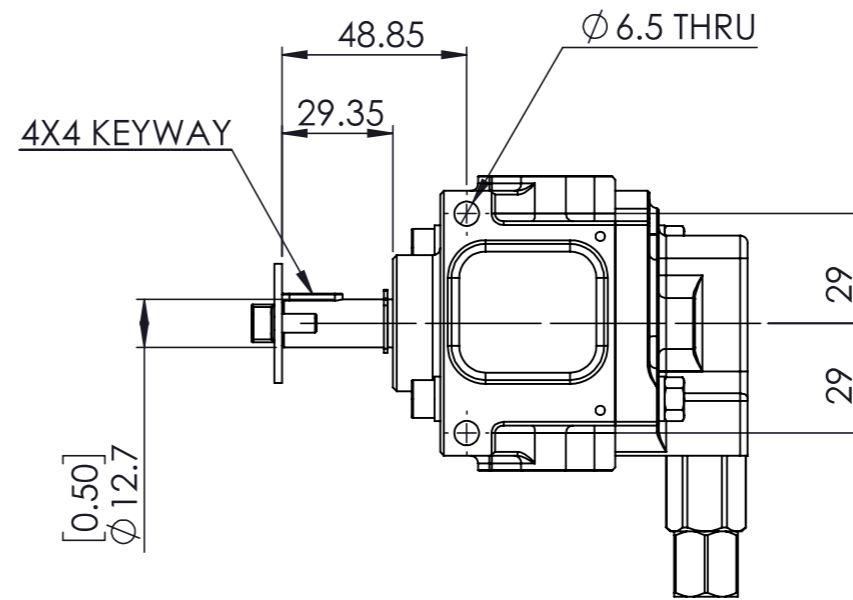

**ISOMETRIC VIEW**

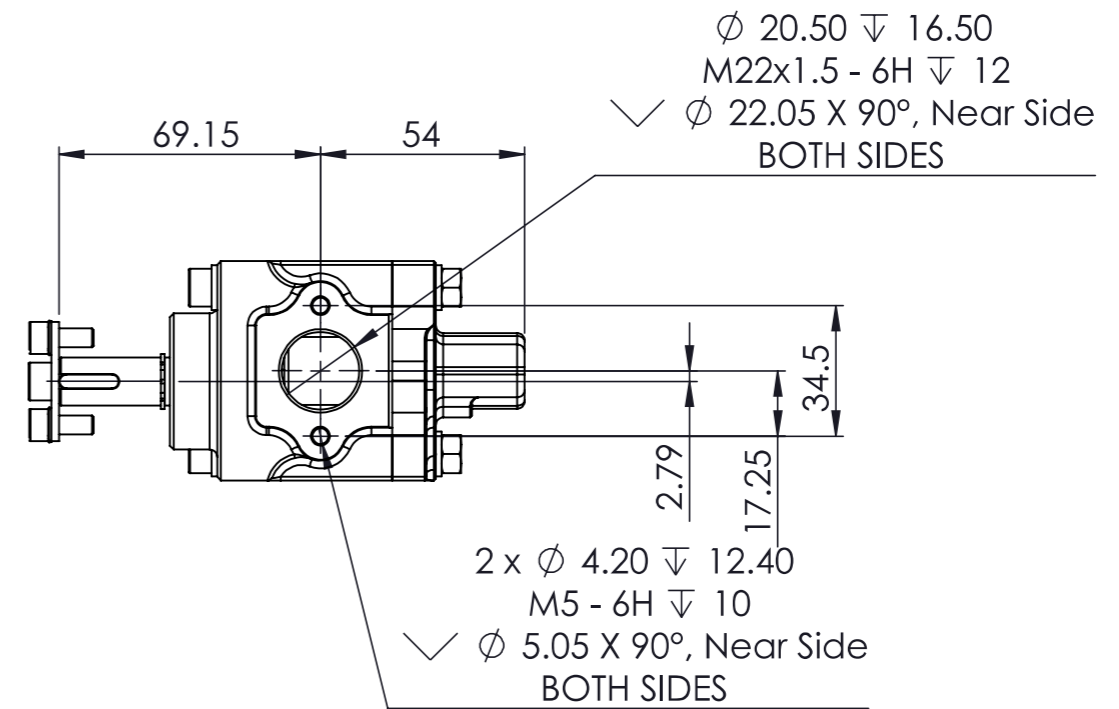

<p><b>alpower</b></p> <p>COPYRIGHT © 2024                  S-CAN 3D LTD                  Unit 10b, Bunn's Bank Rd, Attleborough                  Norfolk, UK, NR17 1QD</p>	<p>THIRD ANGLE PROJECTION</p>	MATERIAL	SEE COMPONENT PARTS
		FINISH	SEE COMPONENT PARTS
<p>UNLESS OTHERWISE STATED:                  DIMENSIONS IN MILLIMETRES                  TOLERANCES: LINEAR <math>\pm</math> 0.1 ANGULAR <math>\pm</math> 0.5°                  SURFACE FINISH <math>\nabla</math> = <math>\nabla</math>                  DRAWING STANDARDS TO ATQS 6003                  DATE FORMAT: DD/MM/YY</p>	SCALE	WEIGHT	DRAWING TITLE
	1:2	-- kg	
<p>THIS DESIGN IS THE PROPERTY OF                  S-CAN 3D LTD AND MUST NOT BE                  PRODUCED OR REPLICATED                  WITHOUT AUTHORITY</p>	DRAWN-	S.HOW	DRAWING NUMBER
	DATE-	18/06/19	
<p>CAD PLOT                  DO NOT                  SCALE</p>	CHECKED -	S.HOW	SHEET 2 OF 2 A3
	APPROVED -	A.CLIFTON	