
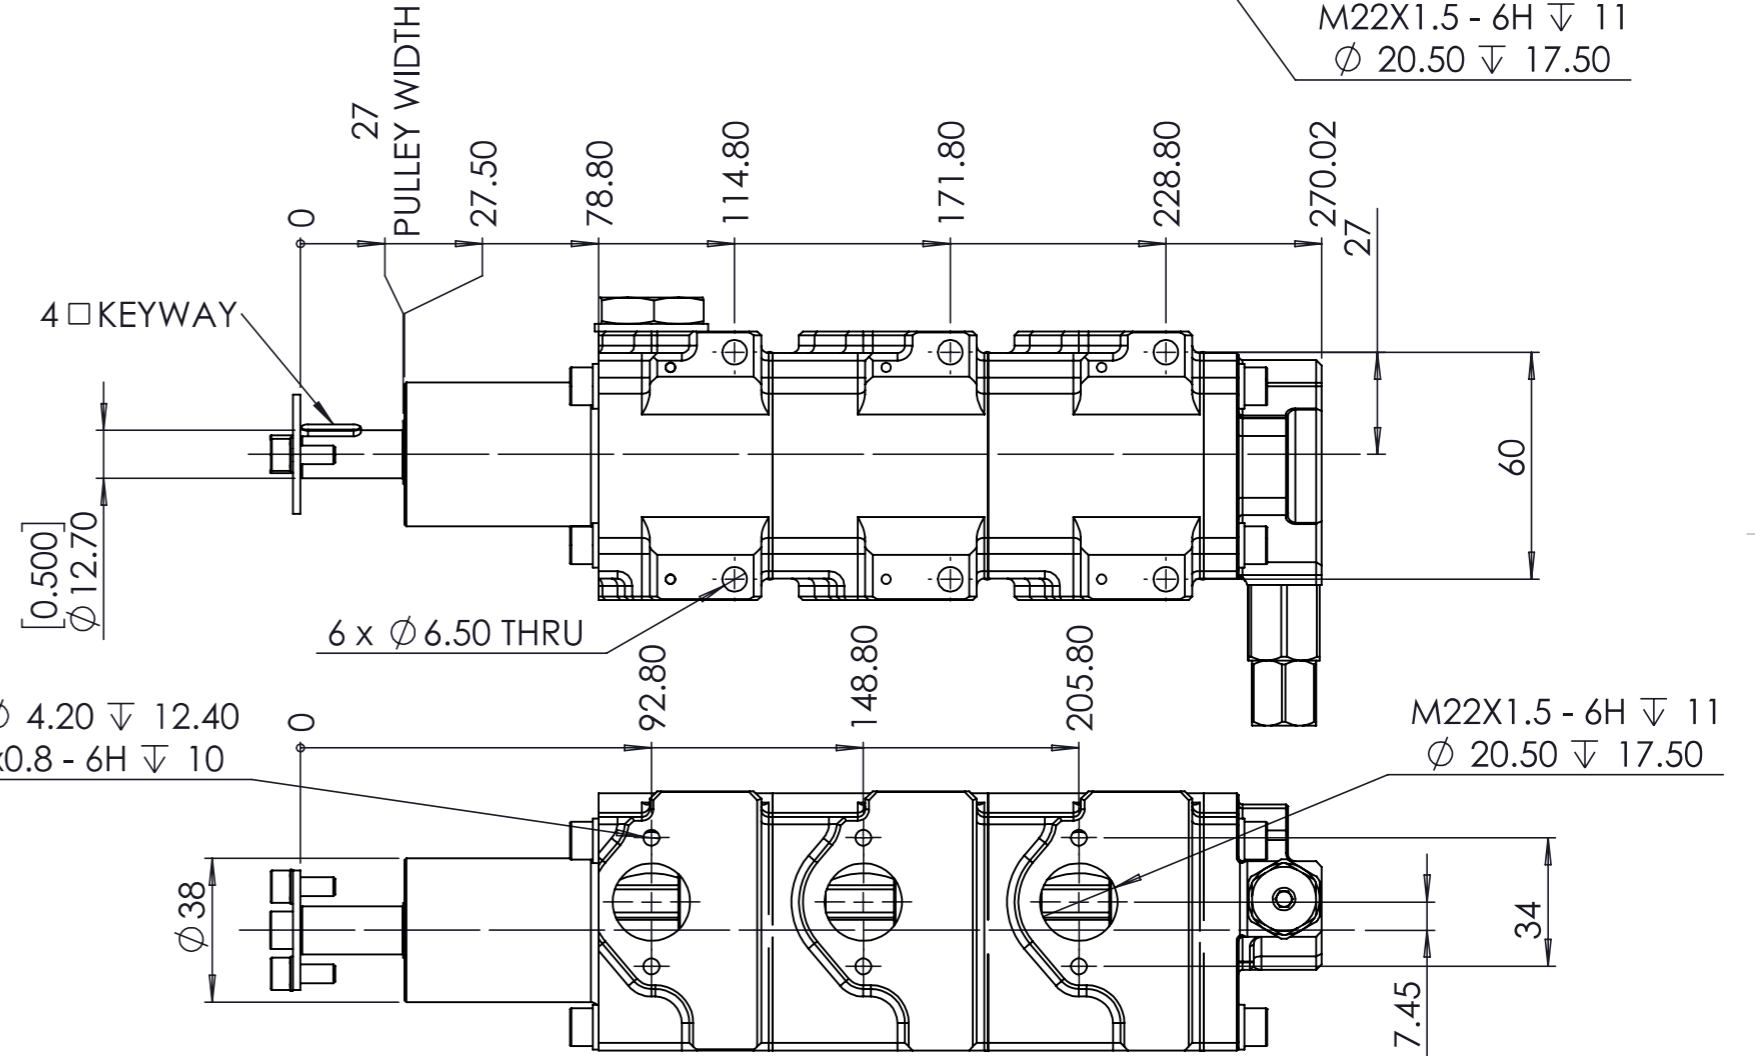
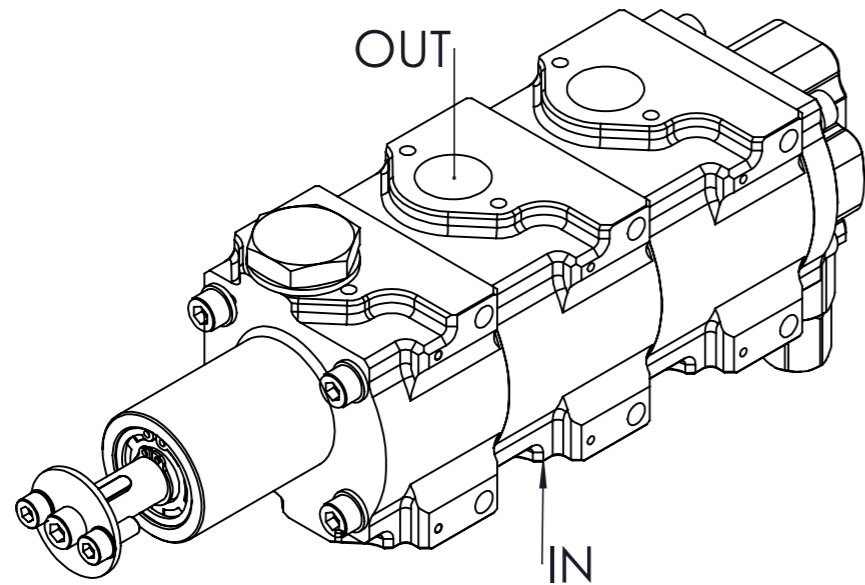


NOTES:


1. DISPLACEMENT PER REVERLUTION PER STAGE = 14.3 CC/REV
2. DISPLACEMENT AT 1000 RPM = 14.3 LT/MIN
3. PRV CRACKING PRESSURE:-  
MINIMUM = 2.9 BAR (42 PSI)  
MAXIMUM = 8.27 BAR (120PSI)
4. FOR EACH FULL TURN OF THE ADJUSTER THE CRACKING PRESSURE WILL INCREASE/DECREASE BY 0.25 BAR (3.6 PSI)

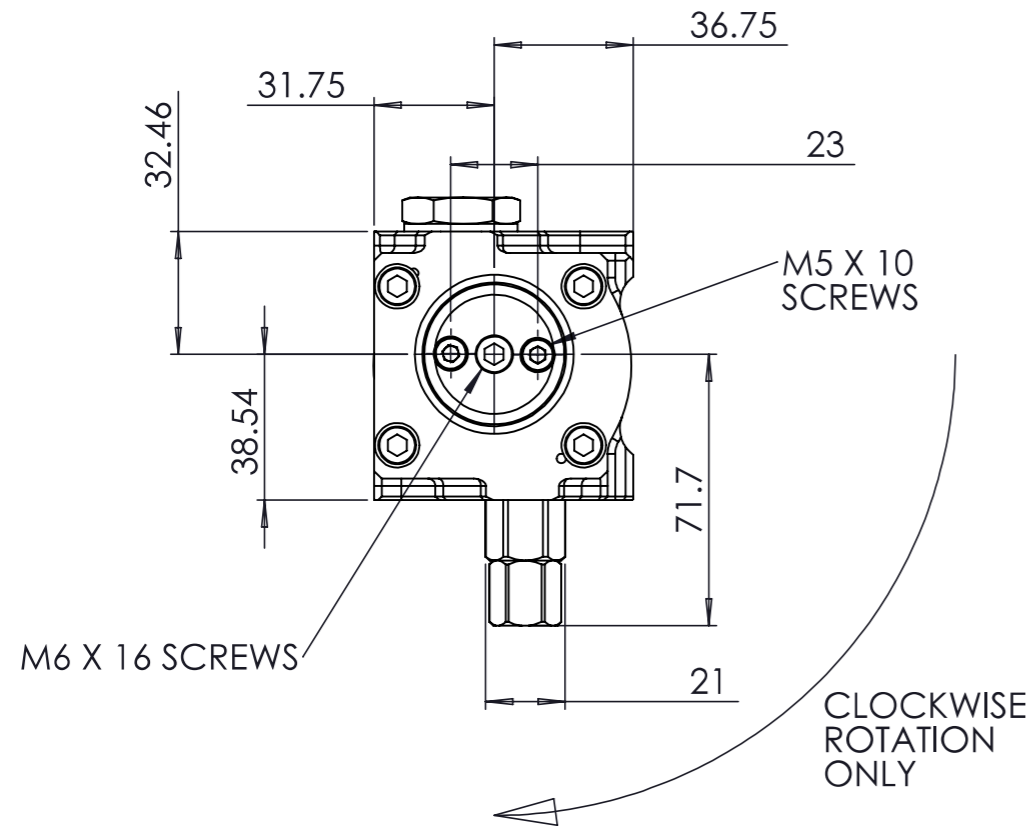

COPYRIGHT © 2024  
S-CAN 3D LTD  
Unit 10b, Bunn's Bank Ind Est, Attleborough  
Norfolk, UK, NR17 1QD

UNLESS OTHERWISE STATED:  
DIMENSIONS IN MILLIMETRES  
TOLERANCES: LINEAR ± 0.1 ANGULAR ± 0.5°  
SURFACE FINISH ∇ = ∇  
DRAWING STANDARDS TO ATQS 6003  
DATE FORMAT: DD/MM/YY

THIS DESIGN IS THE PROPERTY OF  
S-CAN 3D LTD AND MUST NOT BE  
PRODUCED OR REPLICATED  
WITHOUT AUTHORITY



THIRD ANGLE PROJECTION

SCALE 1:2 WEIGHT 2.4 kg

DRAWN- S.HOW

DATE- 21/04/20

CHECKED - S.HOW

APPROVED - A.CLIFTON

MATERIAL  
SEE COMPONENT PARTS

FINISH  
SEE COMPONENT PARTS

DRAWING TITLE  
**3 STAGE CORDIS-PRESSURE  
PUMP-LONG NOSE-14.3 Lt**

DRAWING NUMBER  
**104-103-00088**