
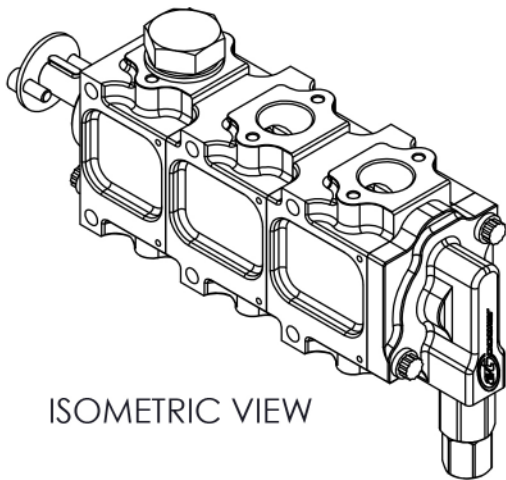
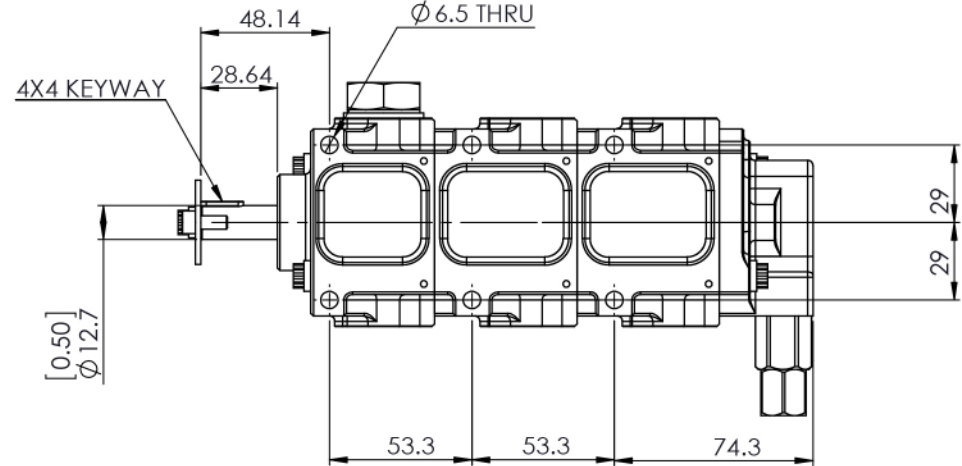
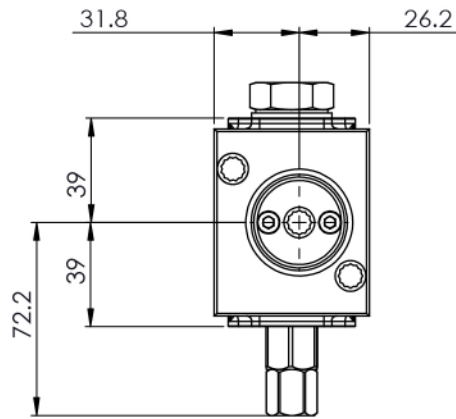


NOTES:

1. DISPLACEMENT PER REVERLUTION PER STAGE = 11.9 CC/REV
2. DISPLACEMENT AT 1000 RPM = 11.9 LT/MIN
3. PRV CRACKING PRESSURE:-  
 MINIMUM = 2.9 BAR (42 PSI)  
 MAXIMUM = 8.27 BAR (120PSI)
4. FOR EACH FULL TURN OF THE ADJUSTER THE CRACKING PRESSURE WILL INCREASE/DECREASE BY 0.25 BAR (3.6 PSI)

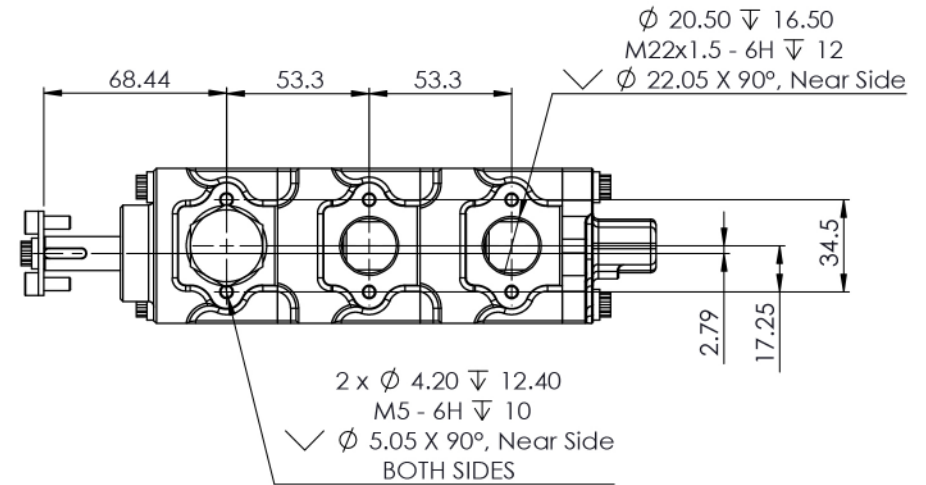

<p>COPYRIGHT © 2024                  S-CAN 3D LTD                  Unit 10b, Bunn's Bank Ind Est, Attleborough                  Norfolk, UK, NR17 1QD</p>	<p>THIRD ANGLE PROJECTION</p>		MATERIAL
	SCALE 1:2	WEIGHT -- kg	SEE COMPONENT PARTS
<p>UNLESS OTHERWISE STATED:                  DIMENSIONS IN MILLIMETRES                  TOLERANCES: LINEAR <math>\pm 0.1</math> ANGULAR <math>\pm 0.5^\circ</math>                  SURFACE FINISH <math>\nabla = \nabla</math>                  DRAWING STANDARDS TO ATQS 6003                  DATE FORMAT: DD/MM/YY</p>	DRAWN- S.HOW	DRAWING TITLE	
	DATE - 23/01/19	3 STAGE MINI CORDIS-FLG MTG - PRESSURE PUMP-SHORT NOSE-11.9 Lt	
<p>THIS DESIGN IS THE PROPERTY OF                  S-CAN 3D LTD AND MUST NOT BE                  PRODUCED OR REPLICATED                  WITHOUT AUTHORITY</p>	CAD PLOT DO NOT SCALE	CHECKED - S.HOW	DRAWING NUMBER
		APPROVED - A.CLIFTON	104-103-00120